



▲ PEAKTRONICS

Actuator Test Equipment

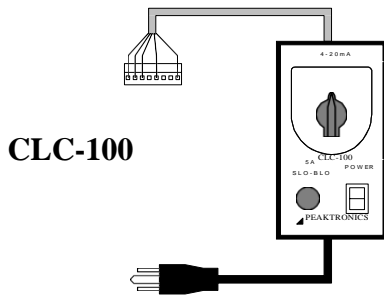


CLC-100

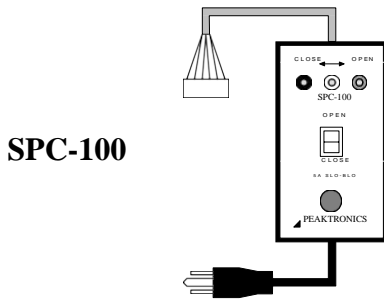


SPC-100

APC-100



Control Panel

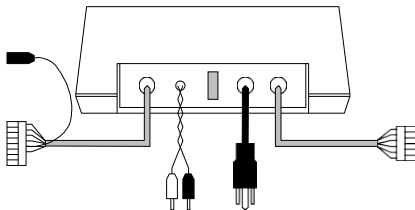

Back Panel

Model	Description	List
CLC-100	Current Loop Calibrator (4-20mA generator for calibrating all 117VAC AMC-100/101, LRC-101, and SVC-100 units)	\$ Call
SPC-100	Switch/Pot Calibrator (Open-close motor switch used to calibrate actuator limit switches and binding posts to monitor feedback pot resistance. Works with all 117VAC AMC-100/101, LRC-101, and SVC-100 units.)	\$ Call
APC-100	AC Positioning Calibrator (Bench style calibrator with feedback pot meter, 4-20mA generator, and 4-20mA digital input/feedback meter for calibrating 117VAC positioners; VCM Modules adapt unit for other voltages.)	\$ Call
VCM-100	Voltage Converter Module, 24VAC (Plugs into APC-100 to convert 117VAC power to 24VAC for calibrating 24VAC actuators.)	\$ Call
VCM-101	Voltage Converter Module, 234VAC (Plugs into APC-100 to convert 117VAC power to 234VAC for calibrating 234VAC actuators.)	\$ Call
VCM-102	Voltage Converter Module, 12/24VDC (Plugs into APC-100 to convert 117VAC power to 12/24VDC for calibrating 12/24VDC actuators.)	\$ Call
CIC-100	Calibrator Interface Cable (Interfaces APC-100 calibrator to FTE-100/101 enclosures.)	\$ Call